
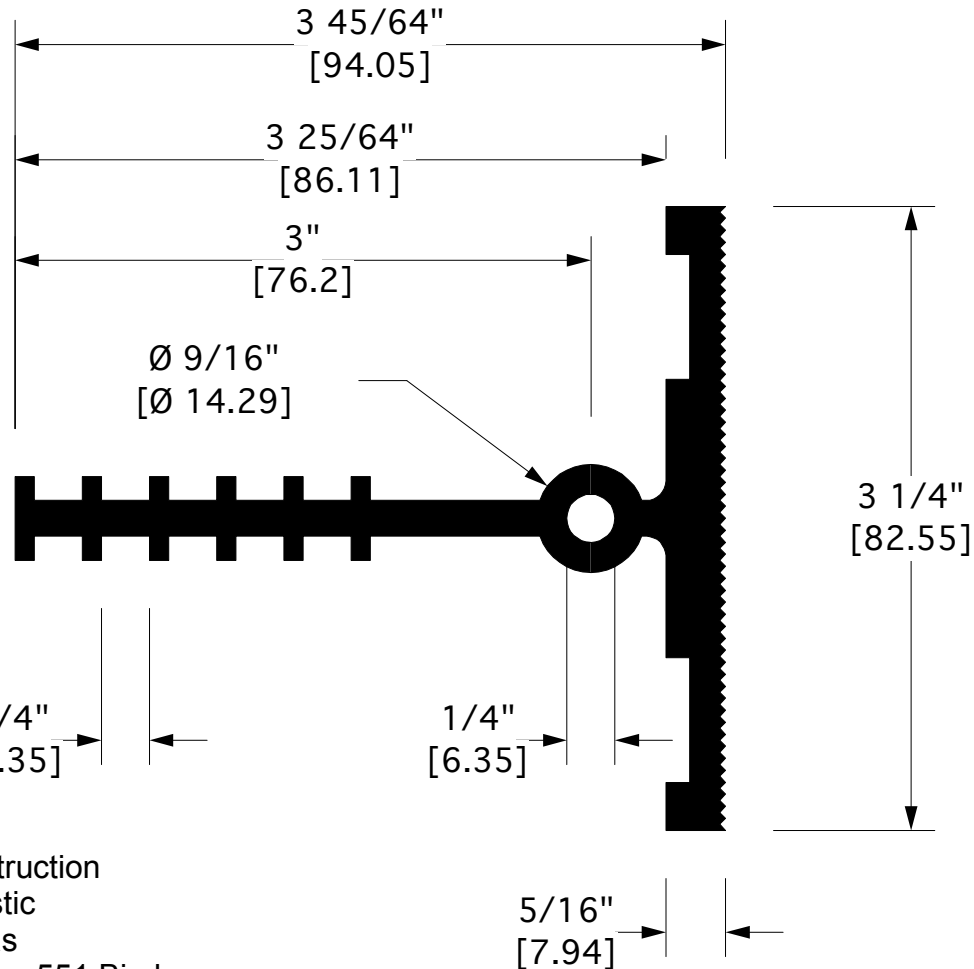


Included components:

- 42 each (per 10 lft waterstop length) — 1-1/4" x 1/4" Climaseal coated Tapcon anchors.

- 2 each (per 10 lft waterstop length) — 1/8" x 5/8" x 119.5" stainless steel batten bar (prepunched 6" on-center to accommodate anchors).

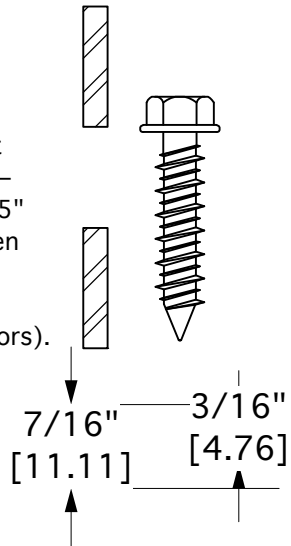

Suggested Short Form Spec

Flexible Retrofit Waterstop

Waterstop indicated in drawings and specifications for expansion and construction joints to be Earth Shield® Thermoplastic Vulcanizate (TPV) **Part No. JP325T** as manufactured by **JP Specialties, Inc.** - 551 Birch Street, Lake Elsinore, CA 92530 - Phone 888-836-5778; International 951-674-6869; Fax 951-674-1315; Web www.earthshield.com; E-mail davidp@earthshield.com

1. Thermoplastic Vulcanizate (TPV) Waterstop shall be certified for use in potable water per NSF/ANSI Standard 61. Third-party certified documentation to be provided by manufacturer.
2. No equals or substitutions allowed.
3. Install per manufacturer's recommendations.

JP Specialties, Inc. / Earth Shield®		
551 Birch Street Lake Elsinore, CA 92530 www.jp-specialties.com phone 800-821-3859 international 951-674-6869 fax 951-674-1315		
TITLE 3" T-Shaped Retrofit		
PART NUMBER JP325T	DRAWN BY DRP	DATE 02/05
CAD FILE NAME JP325T	APPROVALS	SIZE A