

### Suggested Short Form Spec

#### Flexible Retrofit Waterstop

Waterstop indicated in drawings and specifications for large movement joints to be Earth Shield® Thermoplastic Vulcanizate (TPV)

**Part No. JP621L** as manufactured by **JP**

**Specialties, Inc.** - 551 Birch Street, Lake Elsinore, CA 92530 - Phone 888-836-5778;

International 951-674-6869; Fax 951-674-1315;

Web [www.earthshield.com](http://www.earthshield.com); E-mail

[davidp@earthshield.com](mailto:davidp@earthshield.com)

1. All components — stainless steel batten bar, stainless steel anchor bolts, and chemical resistant novolac epoxy — to be supplied by manufacturer.


2. No equals or substitutions allowed.

3. Install per manufacturer's recommendations.

#### Included components:

- 20 each (per 10 lft waterstop length) — 2-1/4" x 1/4" stainless steel wedge anchor.

- 1 each (per 10 lft waterstop length) — 3/16" x 1-1/2" x 119.5" stainless steel batten bar (prepunched 6" on-center to accommodate anchors).

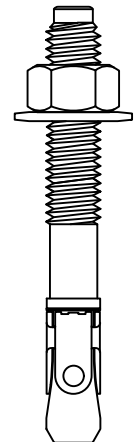

#### JP Specialties, Inc. / Earth Shield®

551 Birch Street • Lake Elsinore, CA 92530 [www.jp-specialties.com](http://www.jp-specialties.com)  
 phone 800-821-3859 • international 951-674-6869 • fax 951-674-1315

TITLE

*Retrofit Expansion Joint System*

PART NUMBER

**JP621L**

DRAWN BY

**DRP**

DATE

**11/08**

CAD FILE NAME

**JP621L**

APPROVALS

SIZE

**A**