

WARNING! CAUTION! Combustible.
A. Contains Petroleum Distillate.
B. Hazard Rating: Health-1; Fire-2;
Reactivity-0
(0=least; 4=extreme)
C. Respiratory: Use with adequate
ventilation. Inhalation of high vapor
concentration may cause headaches
and/or dizziness. NIOSH/MSHA
respirators required if TLV is exceeded.
D. Fire Protection: Keep away from
heat, open flame and any source of
ignition.

E. First Aid: Eye Contact: Rinse
immediately with water for 15
minutes and seek medical advice. Skin
Contact — Use a waterless hand
cleaner. Inhalation — Remove
individual to fresh air. If breathing is
difficult, administer oxygen. If
breathing has stopped, give artificial
respiration; get emergency medical
attention and keep victim warm.
Ingestion — Do not induce vomiting.
Get medical attention immediately!


F. Waste Disposal: Seal container
when not in use. Empty containers
must be disposed in approved landfill
in accordance with local, state and
federal regulations.

G. Spill or Leak: Shut off ignition
source; no open flame. Stop leak if
you can without risk. Take up with
sand or other suitable material.
Prevent from entering drains, sewers
or waterways.

**FOR MORE INFORMATION SEE
MSDS.**



Type 10, Type 20 & Type 23 Strip-Applied Waterstop Primer

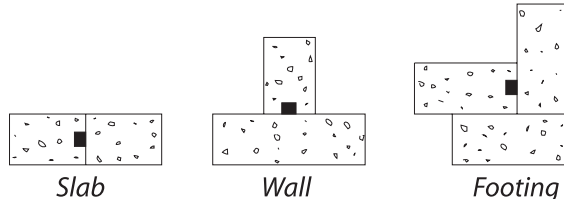

**DO NOT THIN THIS PRODUCT
1 GALLON (3.79 LITERS)
Approximate Coverage: 150 sqft.
FOR OUTDOOR USE ONLY!**

APPLICATION

1. Apply only to cured, dry concrete, free of dirt, dust and laitance.
2. Apply primer with brush along joint location approximately 2" wide. (Avoid puddling.)
3. Allow Primer to dry **completely**. (Actual time varies by climate — **usually within 24 hours.**)
4. The surface is now ready for Earth Shield® Strip-Applied Waterstop.
5. Press the Earth Shield Waterstop firmly onto the primed surface. Knead the ends together to form a continuous gasket. The concrete surface is ready for the fresh concrete pour.



*Manufacturers of Quality Waterstop,
Waterstop Splicing Equipment, and Accessories
Since 1954*

Earth Shield® Waterstop
551 Birch Street, Lake Elsinore, CA 92530
Phone: 888-836-5778; Fax: 951-674-1315
www.earthshield.com