


316ELC Stainless Steel  
20 gauge

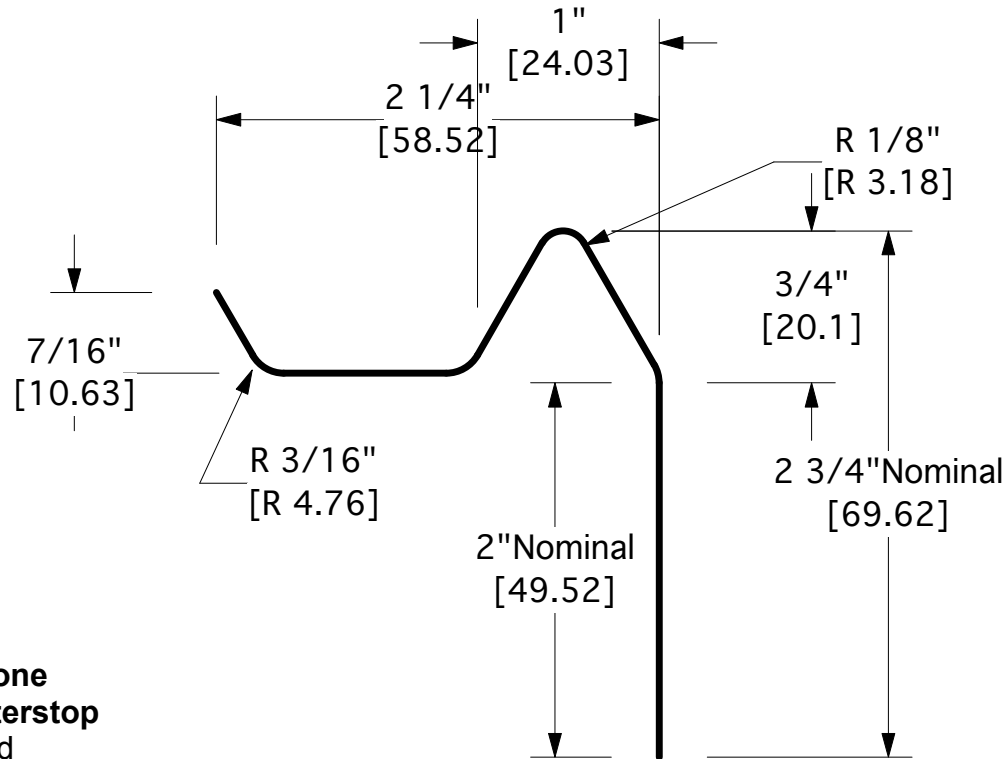

**Suggested Short Form Spec**

**Stainless Steel Chemical and Ozone Resistant, High Temperature Waterstop**

Waterstop indicated in drawings and specifications for contraction (control), expansion and construction joints to be Earth Shield® Stainless Steel (S/S) **Part No. JP358R** as manufactured by **JP Specialties, Inc.** - 551 Birch Street, Lake Elsinore, CA 92530 - Phone 888-836-5778; International 951-674-6869; Fax 951-674-1315; Web [www.earthshield.com](http://www.earthshield.com); E-mail [davidp@earthshield.com](mailto:davidp@earthshield.com)

1. *Stainless steel waterstop shall conform to ASTM A 240 (type 316L), be 20 gauge thick, and manufactured specifically as a waterstop, with outer flanges and center "V", as opposed to flat steel.*
2. *No equals or substitutions allowed.*

<b>JP Specialties, Inc. / Earth Shield®</b>		
551 Birch Street • Lake Elsinore, CA 92530 <a href="http://www.jp-specialties.com">www.jp-specialties.com</a> phone 800-821-3859 • international 951-674-6869 • fax 951-674-1315		
TITLE <b>4" S/S Retrofit Waterstop</b>		
PART NUMBER <b>JP358R</b>	DRAWN BY <b>DRP</b>	DATE <b>04/11</b>
CAD FILE NAME <b>JP358R</b>	APPROVALS	SIZE <b>A</b>