


Included components:

• 42 each (per 10 lft waterstop length) — 1-1/4" x 1/4" Climaseal coated Tapcon anchors.

• 2 each (per 10 lft waterstop length) — 1/8" x 1/2" x 120" stainless steel batten bar (prepunched 6" on-center to accommodate anchors).

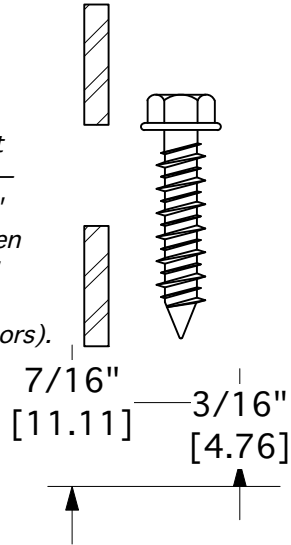


Suggested Short Form Spec

Flexible Retrofit Waterstop

Waterstop indicated in drawings and specifications for contraction (control), expansion and construction joints to be Earth Shield® High Density Polyethylene (HDPE) **Part No. PE325T** as manufactured by **J P Specialties, Inc.** - 25811 Jefferson Avenue, Murrieta, CA 92562 - Phone 800-821-3859; International 951-763-7077; Fax 951-763-7074; Web www.earthshield.com; E-mail davidp@earthshield.com

1. Certified resistance to fuel, diesel fuel, and jet fuel.
2. No equals or substitutions allowed.
3. Install per manufacturer's recommendations.

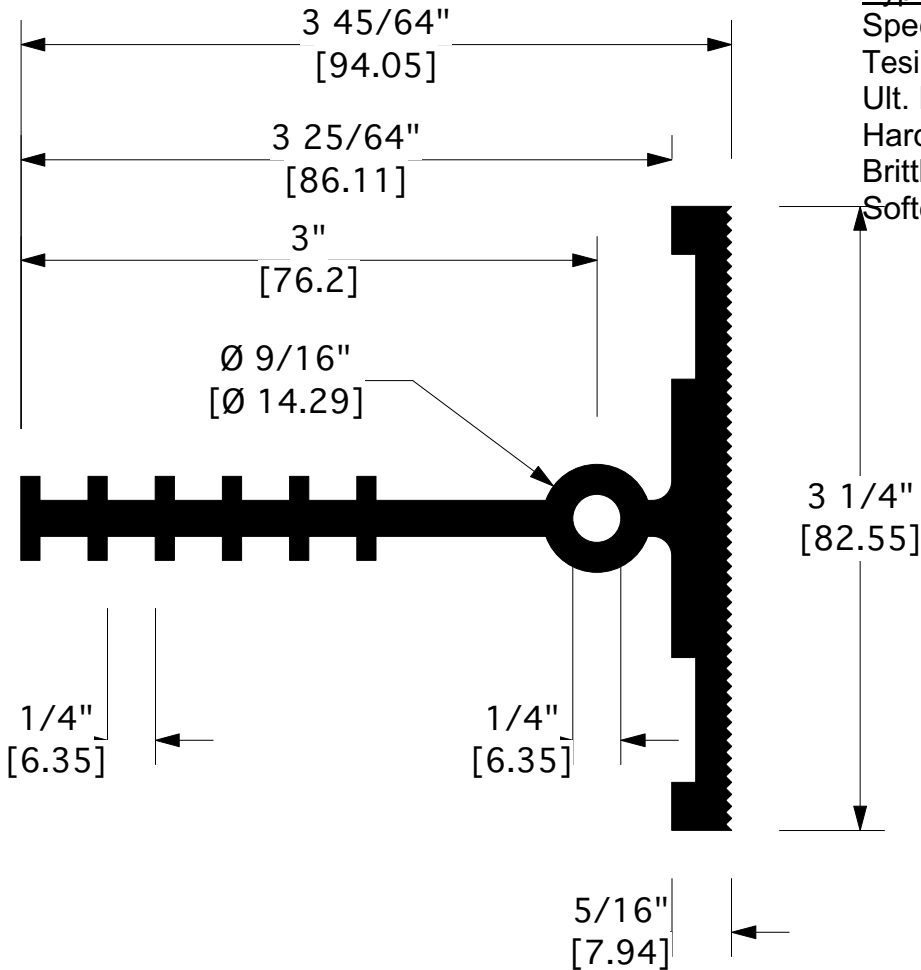

Typical Physical Properties

Spec Gravity	.943
Tesile Strength	5,100 psi
Ult. Elongation	750%
Hardness	90A
Brittleness	-148°F
Softening	207°F

J P Specialties, Inc. / Earth Shield® Waterstop 25811 Jefferson Avenue, Murrieta, CA 92562 951-763-7077 • www.jp-specialties.com		
TITLE 3" T-Shaped Retrofit		
PART NUMBER PE325T	DRAWN BY DRP	DATE 08/17
CAD FILE NAME PE325T	APPROVALS	SIZE A