


Earth Shield high density polyethylene waterstop can be heat welded to many\* commercially available hdpe liners, T-locks, and embeds.

\*Consult with Earth Shield Technical Support to perform sample weld prior to purchase.

Additional profiles are available.

Dimensions are subject to manufacturing tolerances.

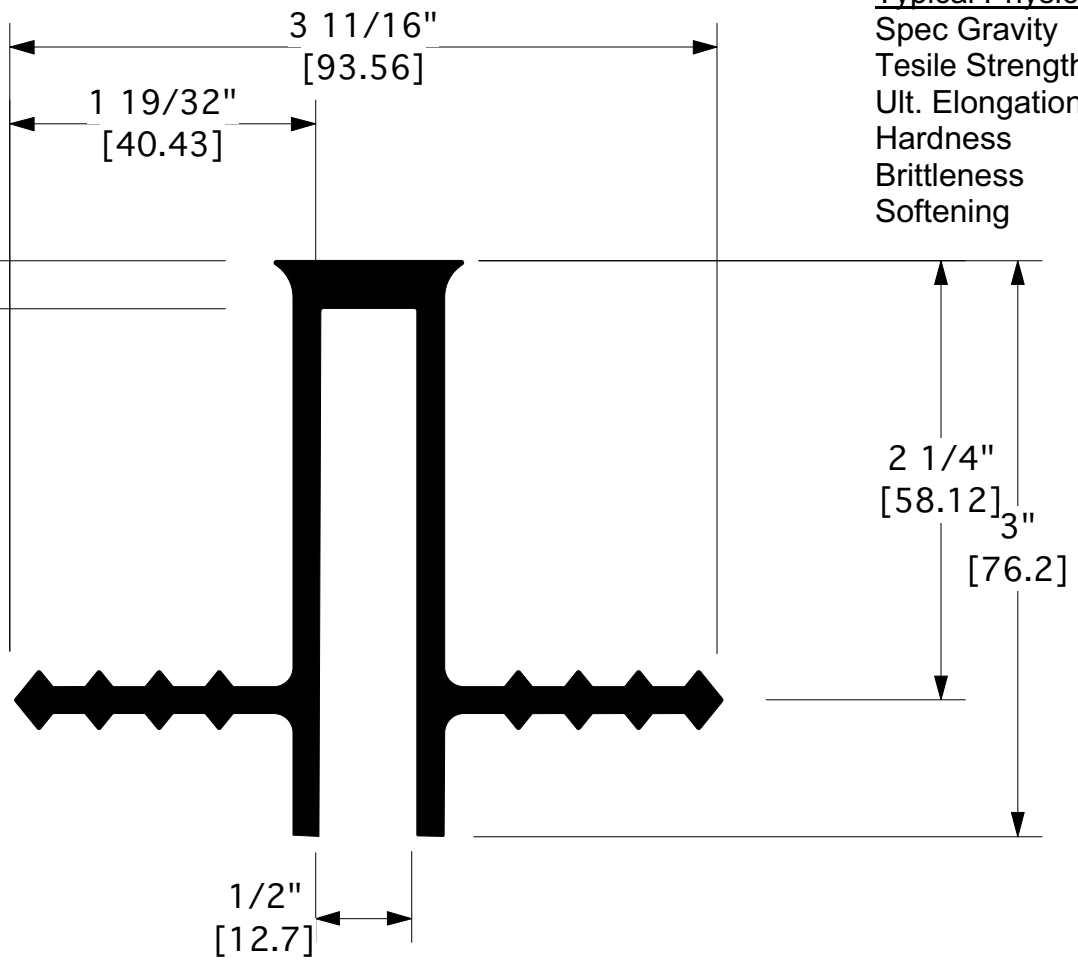

Typical Physical Properties	
Spec Gravity	.943
Tesile Strength	5,100 psi
Ult. Elongation	750%
Hardness	90A
Brittleness	-148°F
Softening	207°F

**Suggested Short Form Spec**

**Flexible Waterstop**

Waterstop indicated in drawings and specifications for expansion joints to be Earth Shield® High Density Polyethylene (HDPE) **Part No. PEEB350** as manufactured by **J P Specialties, Inc.** - 25811 Jefferson Avenue, Murrieta, CA 92562 - Phone 800-821-3859; International 951-763-7077; Fax 951-763-7074; Web [www.earthshield.com](http://www.earthshield.com); E-mail [davidp@earthshield.com](mailto:davidp@earthshield.com)

1. Certified resistance to fuel, diesel fuel, and jet fuel.
2. No equals or substitutions allowed.

J P Specialties, Inc. / Earth Shield® Waterstop 25811 Jefferson Avenue, Murrieta, CA 92562 951-763-7077 · <a href="http://www.jp-specialties.com">www.jp-specialties.com</a>		
TITLE <b>PE Expansion Board Cap</b>		
PART NUMBER <b>PEEB350</b>	DRAWN BY <b>DRP</b>	DATE <b>08/18</b>
CAD FILE NAME <b>PEEB350</b>	APPROVALS	SIZE <b>A</b>