


Typical Physical Properties

Spec Gravity	.943
Tesile Strength	5,100 psi
Ult. Elongation	750%
Hardness	90A
Brittleness	-148°F
Softening	207°F

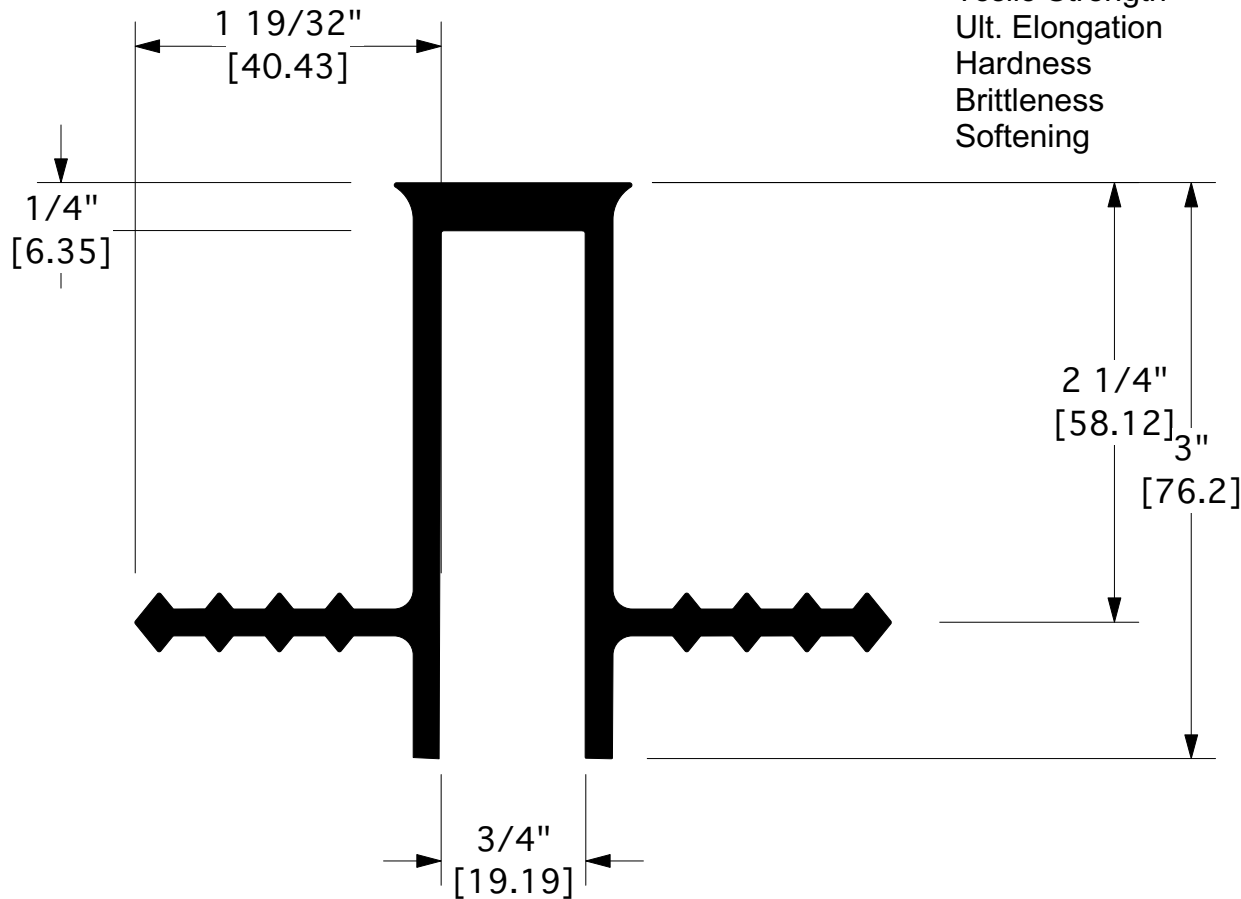

Earth Shield high density polyethylene waterstop can be heat welded to many\* commercially available hdpe liners, T-locks, and embeds.

\*Consult with Earth Shield Technical Support to perform sample weld prior to purchase.

Additional profiles are available.

Dimensions are subject to manufacturing tolerances.

**Suggested Short Form Spec**

**Flexible Waterstop**

Waterstop indicated in drawings and specifications for expansion joints to be Earth Shield® High Density Polyethylene (HDPE) **Part No. PEEB375** as manufactured by **J P Specialties, Inc.** - 25811 Jefferson Avenue, Murrieta, CA 92562 - Phone 800-821-3859; International 951-763-7077; Fax 951-763-7074; Web [www.earthshield.com](http://www.earthshield.com); E-mail [davidp@earthshield.com](mailto:davidp@earthshield.com)

1. Certified resistance to fuel, diesel fuel, and jet fuel.
2. No equals or substitutions allowed.

J P Specialties, Inc. / Earth Shield® Waterstop 25811 Jefferson Avenue, Murrieta, CA 92562 951-763-7077 · <a href="http://www.jp-specialties.com">www.jp-specialties.com</a>		
TITLE <b>PE Expansion Board Cap</b>		
PART NUMBER <b>PEEB375</b>	DRAWN BY <b>DRP</b>	DATE <b>08/18</b>
CAD FILE NAME <b>PEEB375</b>	APPROVALS	SIZE <b>A</b>